


# Connect2Learn Cradlepoint

## Pib: Cradlepoint R500

Muaj ntau yam koj tuaj yeem ua nrog koj lub cuab yeej tshiab, yog li ntawm no yog qhov nrawm nrawm ntawm qee yam khoom yooj yim kom koj pib.

### Khawm thiab Icons

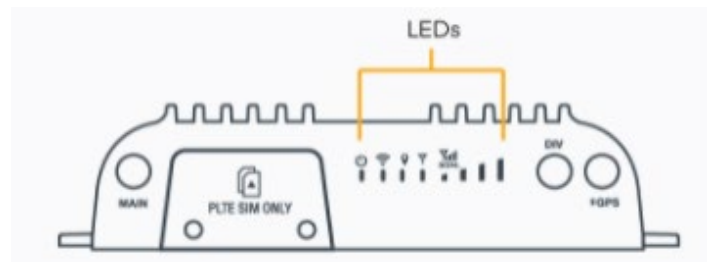


	<b>SIGNAL STRENGTH:</b> Blue LED bars indicate the active modem's signal strength.
	Four Solid Bars = Strongest Signal.
	One Blinking Bar = Weakest Signal.

INDICATOR	BEHAVIOR
	<b>POWER:</b> The Cradlepoint R500-PLTE Router must be powered using a 4-pin power source.
	No Light = Not receiving power. Check the power switch and the power source connection.
	Blue = Powered On
	<b>EMBEDDED MODEM:</b> Indicates the status of the embedded LTE modem.
	No Light = Modem not connected.
	Solid Green = Modem has established an active connection.
	Blinking Green = Modem is connecting.
	Solid Yellow = Modem is not active.
	Blinking Yellow = Data connection error. No modem connection possible.
	Blinking Red = Modem is in the process of resetting. Blinking Red with Signal Strength LEDs = SIM door is not installed, modem is off.

### 1. Txuas LTE Cellular Kav hlau txais xov

R500-PLTE router suav nrog ob lub LTE cellular (paddle) antennas. Txuas cov kav hlau txais xov rau cov chaw nres nkoj cim MAIN thiab DIV, raws li qhia hauv qab no.


- Tuav lub kav hlau txais xov ncaj thiab twist lub hauv paus rau xov rau lub connector. Tighten with fingers only. Do not over-tighten.
- Thaum lub router yog mounted thiab powered on, tig lub kav hlau txais xov kom pom cov teeb liab txais tos.

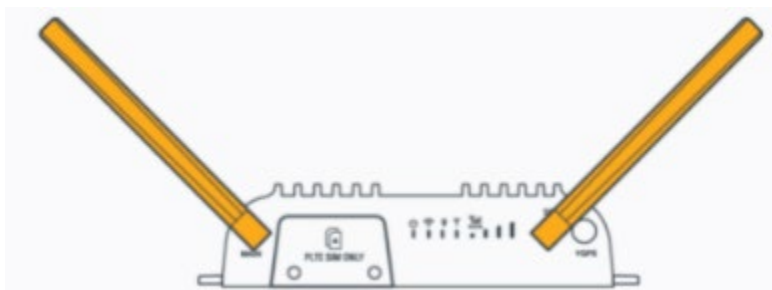

## 2. Txuas lub kav hlau txais xov Wi-Fi

R500-PLTE router suav nrog ob lub Wi-Fi (stick) kav hlau txais xov. Txuas cov kav hlau txais xov rau cov chaw nres nkoj cim 2.4 / 5GHz, raws li qhia hauv qab no.

- Tuav lub kav hlau txais xov ncaj thiab twist lub hauv paus rau xov rau lub connector.
- Ua kom nruj nrog ntiv tes nkaus xwb. Tsis txhob nruj heev.
- Thaum lub router tau teeb tsa thiab ua haujlwm rau, tig lub kav hlau txais xov kom pom cov teeb liab txais tos.

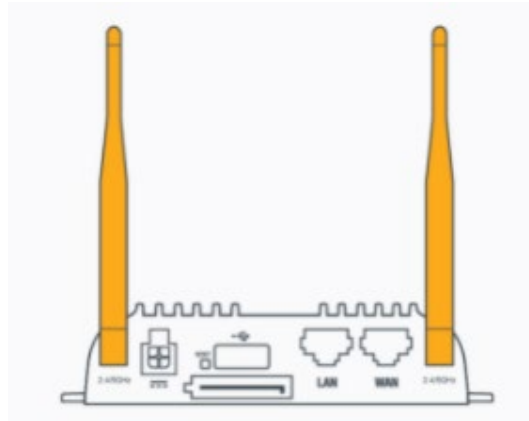

## 3. Nrhiav Wi-Fi Npe thiab Password

- Hauv qab ntawm chav tsev Cradlepoint
- Lub Npe Wi-Fi (SSID) tseem ceeb hauv daj
- Wi-Fi Password (Default Password serial) sab saum toj ntawm chav tsev tseem ceeb nyob rau hauv daj



## Txuas rau Wireless Network

- Qhib daim ntawv thov Wi-Fi ntawm lub cuab yeej uas koj xav txuas rau koj lub Cradlepoint hotspot. Tom qab ntawd nrhiav SSID Wi-Fi lub npe.
- Nyem rau txuas thiab sau lo lus zais thaum raug ceeb toom.
- Qhib koj lub browser thiab koj zoo mus.